


MAIN FEATURES

Highest quality and reliability. ComAp IntelliLite AMF 25 controller. Ready to control MAINS – GENERATOR transfer switch. Configured for both manual and automatic mode (MRS + AMF). Wide range of remote communications options.	Wide range of standard and optional equipment. Engine heater – ready to load just after start. Drip tray, Anticorrosion coating: frame - Zr, canopy – Zr, Al-Zn. Brushless alternator.
---	--

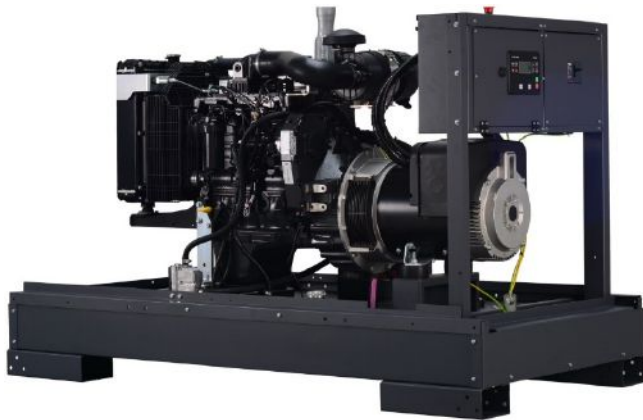

Pictures for reference only

GENERAL DATA

Standby power E.S.P. [kVA] / [kW]	66,0 / 53,0
Prime power P.R.P. [kVA] / [kW]	60,0 / 48,0
Prime current P.R.P [A]	87,0
Frequency [Hz]	50
Voltage [V]	400
Exhaust emission	non-emission
Fuel type	Diesel (EN 590)
Fuel consumption - 50% load [l/h]	7,6
- 75% load [l/h]	10,8
- 100% load [l/h]	14,6
- 110% load [l/h]	15,9
Engine control voltage [V]	12
Standard fuel tank capacity [l]	210
Autonomy with 100% load [h]	13,6
Design	S2003T210

Generator version	open	canopy
Model	FD 60 P-ST1	FD 60 P-ST
Weight without fuel [kg]	~790	1050
Dimensions L x W x H [mm]	2190 x 1110 x 1320	2200 x 1130 x 1460
Guaranteed noise power L _{wa} [dBA]	109,2 ± 1,8	93
Acoustic pressure L _{pa} 7m [dBA]	79,4 ± 1,7	63,9 ± 1

Prime Power PRP:

Prime power available in variable load application in accordance with ISO 8528, 10% overload capacity is available for a period of 1 hour within a 12-hour period of operation. Average power consumption should not exceed 80% PRP for each 24-hour period of

Standby power ESP:

Emergency standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, limited to 500 hours of operation per year. Continuous operation limited to 300h.

Remarks:

Ratings represent the genset performance capabilities to standard conditions specified in ISO 8528-1

Norms and directives:

- Machinery directive 2006/42/EC
- Low voltage directive 2014/35/EU
- EMC directive 2014/30/EU
- Noise directive 2000/14/EC
- Emission directive 97/68/EC
- ISO 8528-1/2018, ISO 8528-5/2018
- ISO 8528-13:2016
- IEC 60204-1

STANDARD CONTROLLER

Controller type: ComAp IntelliLite AMF 25

Easy to operate, intuitive graphical interface

Real time clock with battery supply

Stan-by and Prime power applications, AMF function available

Flexible event based history with up to 350 events

3 Phase generator current measurement

Generator and Mains phase voltage measurement

Active/reactive power measurement

Active and reactive energy counter

Running hours counter, multipurpose flexible timers

Battery charging alternator circuit connection

Comprehensive gen-set protections

Wide range of communication capabilities including :

- CAN and USB on board
- Internet access using Ethernet, GPRS or 4G module
- Support for Modbus and SNMP protocols

Cloud-based monitoring and control via WebSupervisor

Active SMS or e-mails (module required)

Geofencing and tracking via WebSupervisor

Operating temperature -20 + 70°C

IP65 operator interface protection


ENGINE

Brand	Perkins
Type	1103A-33TG2
Made in	Great Britain
Engine power [kW]	53,8
Emission standard*	non-emission
Rotation per minute [rpm]	1500
Engine governor	mechanical
Governor class**	G2
Displacement [l]	3,3
No of cylinder	3
Fuel system	direct injection
Electrical system [V]	12
Cooling system capacity [l]	10,2
Oil pan capacity [l]	7,9
Fuel type	Diesel (EN 590)

ALTERNATOR

Nominal Voltage [V]	400
Nominal power factor (cos phi)	0,8
Ambient temperature, altitude	40 °C, 1000m n.p.m.
Nominal Power [kVA]	60,0
IP protection	IP 23
No of bearing	single bearing
Coupling	direct
Technology	brushless
Short circuit maintaining capacity	270% 10s
Efficiency [%]	89,9
Insulation class	H
Total harmonic content THD [%]	<2
Reactance Xd'' [%]	7,3
Voltage regulator type	DVR, digital
Voltage measurement	3 fazy
Voltage accuracy [%]	+/- 0,25
AVR supply system	auxiliary winding
AVR supply optional	PMG
Made in	EU

* According directive 97/68/WE non road mobile machinery engine emission.

** According PN-ISO 8528-5/2018



FOCUSSED ON GENERATORS ONLY

Power Generator FD 60 P-ST draft

STANDARD EQUIPMENT

Perkins 1103A-33TG2 engine	✓
Oil low pressure switch	✓
Engine high temperature switch	✓
Engine preheating with thermostat	✓
Engine oil Titan Cargo 15W40	✓
Fuel filter with water separator	✓
Coolant Fuchs Maintain Fricofin LL-50	✓
Coolant inlet outside of the canopy *	✓
Starting batteries 100 Ah	✓
Battery charger	✓
GCB Schneider NSX 160 3P Micrologic 2.2	✓
GCB shunt release coil	✓
Controller ComAp IL-AMF25	✓
Acoustic alarm	✓
Emergency stop button	✓
Silenced canopy made with Al.-Zn. *	✓
Standard color 7024	✓
Fuel tank integrated with a frame with drip tray	✓
Welded frame with fuel tank	✓
Fuel inlet inside, protected by canopy locked doors *	✓
Fuel level measurement	✓
Engine and alternator vibro isolators	✓
Exhaust compensator and silencer	✓
Transportation brackets	✓

OPTIONAL EQUIPMENT

Oil pressure sensor	<input type="checkbox"/>
Engine temperature sensor	<input type="checkbox"/>
Oil draining hand pump	<input type="checkbox"/>
Battery disconnection switch	<input type="checkbox"/>
GCB 4P Schneider NSX Micrologic 2.2	<input type="checkbox"/>
Power socket connection *	<input type="checkbox"/>
Power sockets box SOM 104 *	<input type="checkbox"/>
Transfer switch controlled by generator controller	<input type="checkbox"/>
Transfer switch with ATS controller	<input type="checkbox"/>
GPRS communication card	<input type="checkbox"/>
Ethernet card	<input type="checkbox"/>
RS 485, RS 232 card	<input type="checkbox"/>
Remote display	<input type="checkbox"/>
Fuel inlet outside of the canopy with lock *	<input type="checkbox"/>
Drip space level sensor	<input type="checkbox"/>
Fuel and retention pump	<input type="checkbox"/>
Alternative fuel tank size 590l	<input type="checkbox"/>
External fuel tank 1 000 – 10 000 l	<input type="checkbox"/>
Fuel tank filling pump and shut-off valve	<input type="checkbox"/>

* Applies only for canopied version

INSTALLATION GUIDELINES

Power terminal	GCB terminal
Recommended cable for up to 30m power cable way	Flexible 5x25 mm ²
Recommended cable for do 30m generator heater supply	Flexible 3x2,5 mm ²
*For additional cable connection with FOGO ATS see ATS wiring diagram	
Exhaust pipe min diameter (max. 7 m, 4 bends)	60,3 mm
Exhaust pipe min diameter (max. 15 m, 4 bends)	76,1 mm

MAINTENANCE GUIDELINES

Fuel filters replacement	500 h / 1 year
Oil replacement	After first 100h, then every 500 h / 1 year
Oil filters replacement	After first 100h, then every 500 h / 1 year
Coolant replacement	1000 h / 2 years
Battery replacement	2 years
Electrical installation supervising	According to local requirements, at least once per year

WARRANTY

Continuous operation generators	12 months up to 1000 working hours
---------------------------------	------------------------------------

Version: Apr-21

Datasheet could be changed without notification

www.fogo.pl

FOGO Sp. z o.o.
ul. Święciechowska 36, Wilkowice
64-115 Święciechowa

tel. +48 65 534 11 80
fax +48 65 534 11 81
agregaty@fogo.pl